## PATENT ABSTRACTS OF JAPAN

(11)Publication number:

05-047666

(43)Date of publication of application: 26.02.1993

(51)Int.CI.

H01L 21/205

(21)Application number: 03-202082

(71)Applicant: FUJITSU LTD

(22)Date of filing:

13.08.1991

(72)Inventor: MATSUMIYA YASUO


SAKUMA YOSHIKI OZEKI MASASHI

## (54) VAPOR GROWTH APPARATUS

## (57) Abstract:

PURPOSE: To alternately perform an ALE and a VPE without exposing a substrate with the atmosphere and without cooling it to the ambient temperature by narrowing between an inner wall of a reaction tube and the substrate on an ALP executing region, extending it on a VPE executing region, and optimizing material gas flowing speeds on the regions.

CONSTITUTION: One reaction tube 1 is defined on an ALF optimized region and a VPE optimized region, a substrate 8 is moved to the regions by a susceptor 7, and a compound semiconductor layer of a molecular layer and an atomic layer by a crystalline growth of VPE and an ALF is formed. In this case, the flowing speed of the material gas in the tube 1 is set to a limit value or more for exhibiting a self-limiting effect on the ALE optimized region and to a limit value or less on the VPE optimized region. Thus, a sectional area of the tube 1 is reduced on the ALE optimized region and increased on the VPE optimized region. In this manner, the ALE and the VPE are alternately executed.

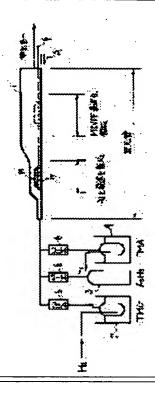

## **LEGAL STATUS**

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]